

# EKA 3000 N

ANTISTATEX® RANGE



EKA 3000 N has excellent cutting properties. The aluminium oxide grit together with the pliable paper backing achieve flexibility and an efficient lacquer sanding operation with fine scratch pattern.

EKA 3000 N is further treated with a new improved stearate coating which effectively reduces clogging problems and contributes to an improved surface finish.

The Antistatex® bonding system provides a fully antistatic effect which minimizes dust load both on the belt surface and on the sanding surface.

## TECHNICAL SPECIFICATION

<b>Backing:</b>	E-weight paper
<b>Bonding:</b>	Resin over resin
<b>Treatment:</b>	Fully Antistatic - Antistatex®, Stearate layer
<b>Grit:</b>	Aluminium Oxide
<b>Coating:</b>	Semi open
<b>A-range:</b>	P240 - P320, P 400
<b>B-range:</b>	P500
<b>Width:</b>	1370 mm, 1420 mm on request

## APPLICATIONS

Lacquer sanding of hard surface.


**Wood:** —

**Board:** —

**Lacquer:** Hard UV-lacquer, PU, PE and Water based lacquer

**Specials:** Melamine foil

## RECOMMENDED FORMS

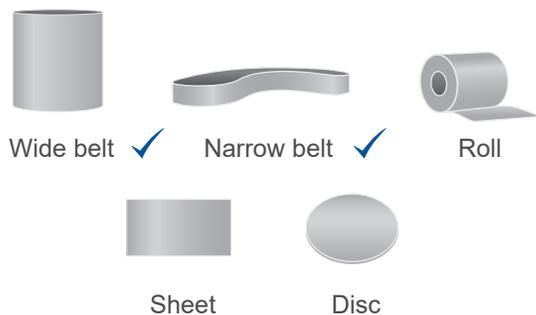

# EKAMANT

SWEDISH QUALITY COATED ABRASIVES

Ekamant AB, Järnvägsgatan 44, SE-285 23 Markaryd, Sweden / [www.ekamant.com](http://www.ekamant.com)