

ARSFO

ANTISTATEX® RANGE



ARSFO has a coating of silicon carbide which contributes to the best possible sanding finish with fine scratch pattern.

The Antistatex® bonding system provides a full antistatic effect which together with open coat grit distribution reduces clogging of the product and minimizes dust load on the sanded surface.

TECHNICAL SPECIFICATION


- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic - Antistatex®
- Grit:** Silicon Carbide
- Coating:** Open
- A-range:** P180 - P240
- B-range:** —
- Width:** 1370 mm, 1420 mm on request

APPLICATIONS

Excellent for finishing sanding. Gives the best possible surface in cross-grained sanding.

- Wood:** Soft and medium hard wood
- Board:** MDF, HDF and Particle board
- Lacquer:** Hard UV-lacquer
- Specials:** —

RECOMMENDED FORMS

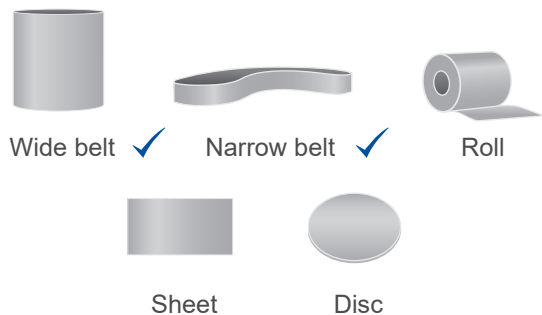

EKAMANT
SWEDISH QUALITY COATED ABRASIVES