

ARSFO N

ANTISTATEX® RANGE



ARSFO N has a coating of silicon carbide, and in combination with a third layer of Stearate it contributes to excellent finish with fine scratch pattern.

The Antistatex® bonding system provides a full antistatic effect which together with open coat grit distribution reduces clogging of the product and minimizes dust load on the sanded surface.

Note: This product is only available as B-Range product.

TECHNICAL SPECIFICATION

Backing:	F-weight paper
Bonding:	Resin over resin
Treatment:	Fully Antistatic with Stearate layer
Grit:	Silicon Carbide
Coating:	Open
Grit range:	P 180—P 240 (B-Range*)
Width:	1370 mm standard

APPLICATIONS

Excellent for finishing sanding. Gives the best possible surface in cross-grained sanding.


Wood: Soft Wood and Medium hard Wood

Board: MDF, HDF and Particle board

Lacquer:

Specials:

RECOMMENDED FORMS

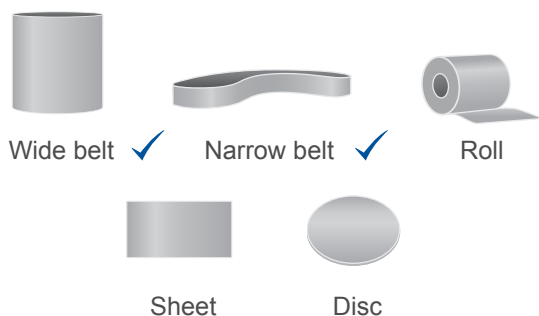

EKAMANT
SWEDISH QUALITY COATED ABRASIVES