

ARSFEO

ANTISTATEX® RANGE



ARSFEO is specially suited for sanding soft resinous wood, such as Pine and Spruce.

The silicon carbide grain coating of ARSFEO will create an even and flat surface with a particularly fine finish, which minimizes the cost for subsequent surface treatment.

The Antistatex® bonding system provides a full antistatic effect which together with an extra open coat grit distribution minimizes clogging problems.

TECHNICAL SPECIFICATION

- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic
- Grit:** Silicon Carbide
- Coating:** Extra-Open
- Grit range:** P 60—P 150 (A-Range*)
P 40—P 50 (B-Range*)
- Width:** 1370 mm standard, 1420 mm per request

APPLICATIONS

Calibrating and intermediate sanding of solid wood and board.


Wood: Soft Wood, veneer and board

Board: MDF, HDF and Particle board

Lacquer:

Specials:

RECOMMENDED FORMS

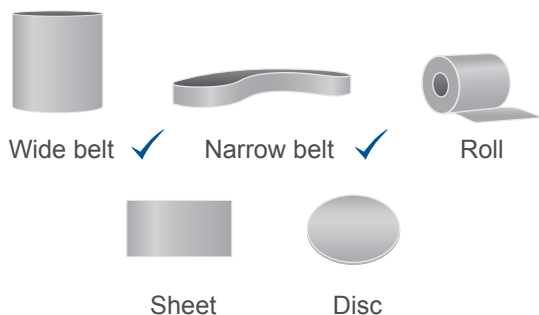

EKAMANT
SWEDISH QUALITY COATED ABRASIVES